

PCA® TWIST SPRAY FAUCET ATTACHMENT 0.30 GPM MAX

Pressure Compensating Regular Size

Features and Benefits

- Distinguished stream with delicate lines and a unique spray pattern.
- Watercolours® design: Color coding to identify flow rate and stream pattern.
- Provides non-splashing, non-aerated spray.
- Pressure compensating for constant flow from 20 to 80 psi.
- Anti-clogging dome screen filters sediment and particles.
- Also compatible with regular and vandal proof M22 and M24 metric housing.
- Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- Laser marked housings with statutory marks.

Certifications

ANSI/NSF * -61-372

ASME A112.18.1M AND CSA B125 (pending)


Meets **CALGreen** requirements

Dimensions

Designation	Thread Size
Insert only	
Regular male	15/16"-27
Regular female	55/64"-27
Regular dual thread	15/16"-27 x 55/64" -27
Vandal Proof Regular male	15/16"-27
Vandal Proof Regular female	55/64"-27
Vandal Proof Regular dual thread	15/16"-27 x 55/64" -27

Dimensions

No	mm	In
A	20.88	.822
B	12.00	.472
C	19.97	.786
D	≈ 25	≈ 1

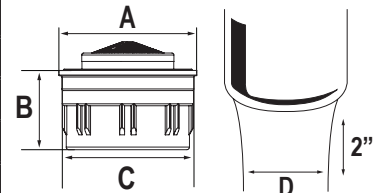


Housing




Technical Data

Materials:	Body	Acetal
	O-Ring	EPDM
	Washer	EPDM

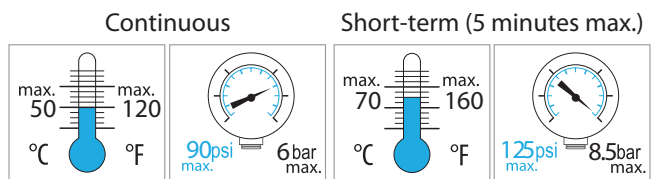

Flow Rate Curve

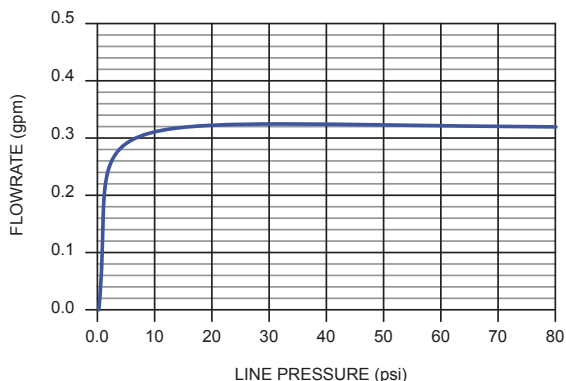

SWISS ECO
Fresh • Clean • Efficient

Swiss Eco Inc. • 87 Morland Crescent • Aurora, ON L4G 7Z1 • info@swisseco.ca • www.swisseco.ca